

SOM-DK7600S Evaluation Kit

MIL-Grade System Development Kit COM Express R3.0 Mini Module Type 10 Pin Definition



Features


- Compact Size with Open Standard VITA 75.0
- Modular Structure Comes with COMe, Carrier, I/O and Power Modules
- MIL-DTL-38999 Circular Connectors with IP Waterproof
- MIL-STD 810, 461 and IPC-A-610 Class 3 Compliant
- Operating Temperature up to -40 ~ 71°C
- Wide Range Power Input +12 to 40V_{DC}
- Replaceable CMOS battery



Specifications

Platform	Box Form Factor	VITA 75.0 Standards. VU10x6x10
	COMe Module	COMe R3.0 Mini Type 10 Modules SOM-7569
	Memory	Onboard Industrial-grade DDR3L 8G, eMMC 32GB
Expansion	Mini-PCIe/Acropack	2* mini-PCIe/ Acropack slots (PCIe & USB 2.0 support)
	M.2	1* M.2 key-B 2242/ 2280 slot
Connector Interfaces	J1	I/O 55 pins with MIL-DTL-38999 circular type (A key) 1* Reserved 55 pins for acropack expansion module
	J2	I/O 55 pins with MIL-DTL-38999 circular type (N key) 2* USB 2.0 2* RS232 4* GPIO 1* I2C 1* SMBus 1* Audio (stereo in & out)
	LAN	RJ-45 with MIL-DTL-38999 circular type 1* Ethernet port (10/100/1000)
	USB	USB 3.0 with MIL-DTL-38999 circular type 1* USB 3.0 port (USB 2.0 & USB 3.0)
	HDMI	HDMI with Industrial circular type 1* HDMI port
	DC-IN	Power with MIL-DTL-38999 circular type 1* DC-IN 6 pins
	Battery	CMOS
Power	Type	AT: Vin
	Supply Voltage	+28V nominal input (input range +12 to 40V), Maximum 200W
Environmental (*designed to meet)	Temperature	Operating Temperature: -40 ~ 71 °C (-40 ~ 160 °F) Storage -40 ~ 85 °C (-40 ~ 185 °F)
	Humidity	Operating: 40 °C @ 95% relative humidity, non-condensing Storage: 60 °C @ 95% relative humidity, non-condensing
Mechanical	Dimensions	8.0"x7.2"x4.0" in (203x184x101 mm)
Weight	Weight	N/A
Mounting kit	mounting on side	VITA VU6 (4.8" in/ 122 mm)

Block Diagram

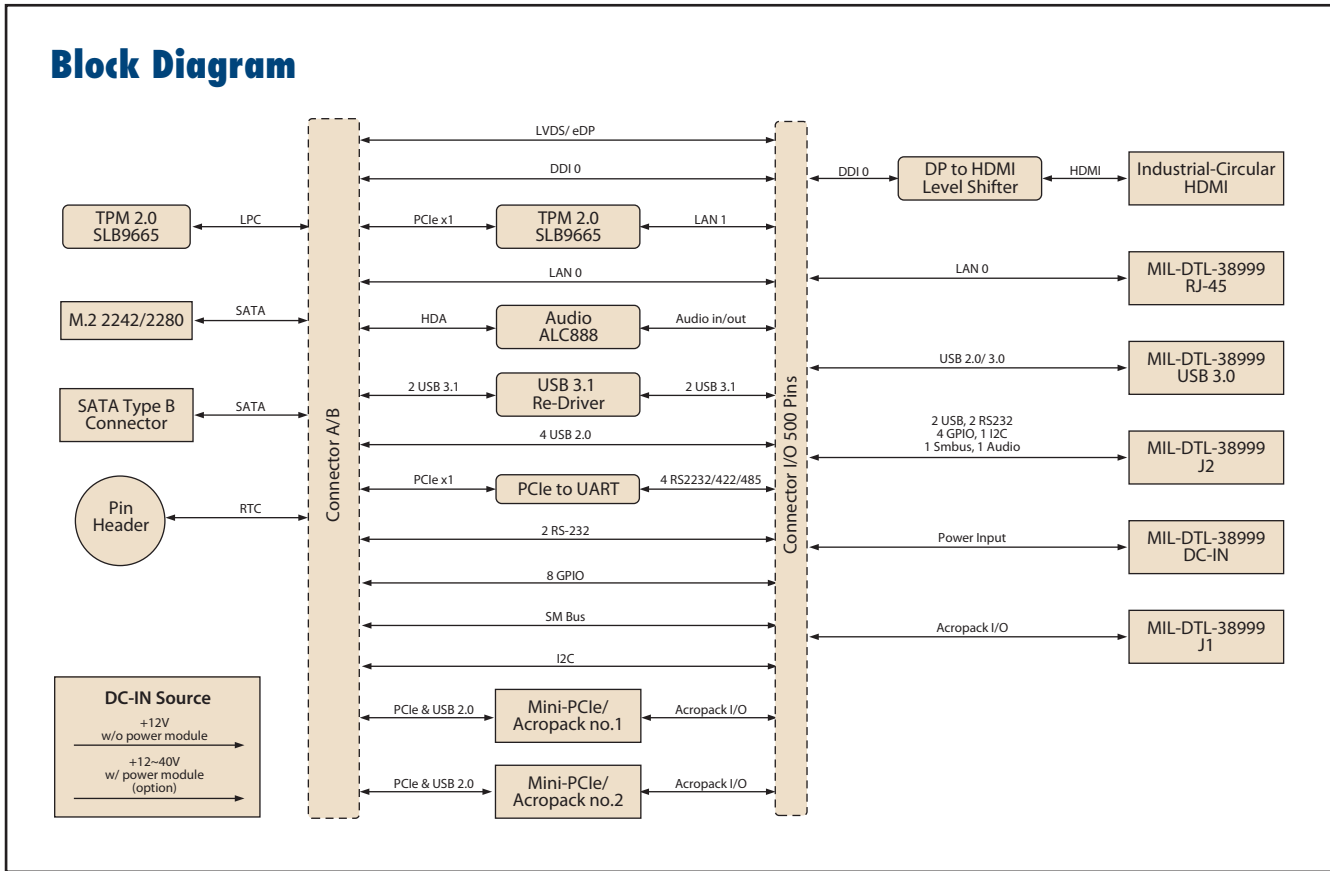

Ordering Information

Part No.	Description
Contact sales	COMe Type 10 System Evaluation Kit

Optional Accessory

Part No.	Description	Quantity
N/A	Acropack I/O Module	1
N/A	VITA 75.0 Mounting kit	1

Packing List

Part No.	Description	Quantity
N/A	SOM-7569 (COMe X7-E3950, onboard DDR 8GB, 32GB eMMC, -40 ~ 85 °C)	1
N/A	SOM-7569 (carrier board, -40 ~ 85 °C)	1
N/A	SOM-EA8610 (MIL-DTL-38999 I/O board, -40 ~ 85 °C)	1
N/A	SOM-EA8700 (MIL-grade power board, -40 ~ 85 °C)	1
N/A	Enclosure (IP waterproof, fanless)	1
N/A	MIL-DTL-38999 adapter cable (Amphenol 55pins, N key)	1
N/A	MIL-DTL-38999 adapter cable (Amphenol 55pins, A key)	1
N/A	MIL-DTL-38999 adapter cable (Amphenol 6pins, DC-IN)	1
N/A	Pelican Protector Case (Watertight, crushproof, and dustproof)	1
N/A	+24VDC Power Adapter (0 ~ 40 °C)	1